

# AITIOU

## AIC-1708(C-04)

◎ Amorphous Toroidal Cut Core(Used Choke)

◎ Mechanical Properties

Bare Core Dimensions (mm)			Finished Core Dimensions (mm)			Case Material & Color
od $\pm$ 0.2	id $\pm$ 0.2	h $\pm$ 0.3	OD $\pm$ 0.5	ID $\pm$ 0.5	H $\pm$ 0.5	
16.30	9.90	6.00	18.90	7.80	8.50	PBT or NYLON,White VS.Black

◎ Typical Parameters and Magnetic Properties

Lm (mm)	Ac (mm <sup>2</sup> )	Wa (mm <sup>2</sup> )	WaAc (mm <sup>4</sup> )	Vol (mm <sup>3</sup> )	L <sub>0</sub>	A <sub>L</sub> TYP	$\mu_i$ 1KHz/0.25V
					(mm)	(nH)	
41.13	15.36	47.76	733.58	789.77	0.0	117.0	250


◎ Core Finished Material:

Insulating Covers:UL94V-0 or equivalent

◎ Temperature Range:

Storage temperature-20 ~ +50 °C Ambient Temperature

Operating Temperature -40 ~ +120 °C Case Surface Temperature

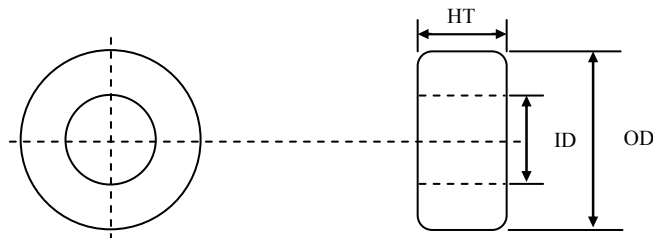

WIRE	0.7 $\phi$	TURNS	10Ts	TEMP.	25 °C
------	------------	-------	------	-------	-------

2 TEST INSTRUMENTS: 1320&LCR100(1KHz/0.25V)

