

# AITIOU

## A12F-6

◎ Amorphous Toroidal Core(Used Mag-Amp)

◎ Mechanical Properties

Bare Core Dimensions (mm)			Finished Core Dimensions (mm)			Case Material & Color
O.D <sub>MAX</sub>	I.D <sub>MIN</sub>	H.T <sub>±0.2</sub>	O.D <sub>±0.2</sub>	I.D <sub>±0.3</sub>	H.T <sub>±0.3</sub>	
12.2	8.5	4.5	14.4	6.7	6.9	PBT or NYLON,Black

◎ Typical Parameters and Magnetic Properties

Lm (mm)	Ac (mm <sup>2</sup> )	Wa (mm <sup>2</sup> )	WaAc (mm <sup>4</sup> )	Vol (mm <sup>3</sup> )	100KHz, 80A/m RT	
					$\psi_c(\mu \text{ Wb})$	Br/Bm(%)
32.50	6.66	35.24	234.69	270.55	14.65	90 MIN


◎ Core Finished Material:

Insulating Covers:UL94V-0 or equivalent

◎ Temperature Range:


Storage temperature-20 ~ +50°C Ambient Temperature

Operating Temperature -40 ~ +120°C Case Surface Temperature

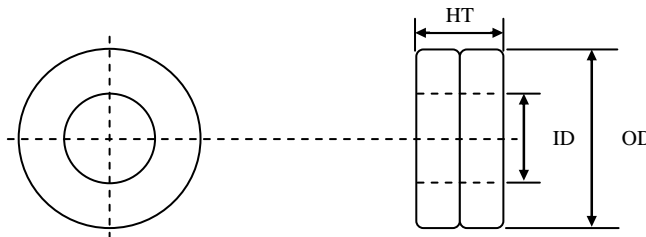

WIRE	0.8φ	TURNS	0.5 Ts	TEMP.	25°C
------	------	-------	--------	-------	------

Hysteresis loops of core materials

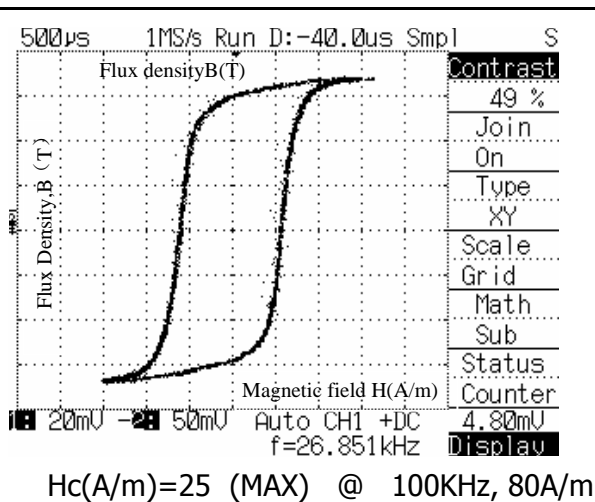

Magnetic Induction (Gauss) VS. Core Loss

