

AITIOU

AIC-1105(C-01)

◎ Amorphous Toroidal Core(Used Mag-Amp)

◎ Mechanical Properties

Bare Core Dimensions (mm)			Finished Core Dimensions (mm)			Case Material & Color
O.D _{MAX}	I.D _{MIN}	H.T _{±0.2}	O.D _{±0.3}	I.D _{±0.3}	H.T _{±0.3}	
9.6	7.4	3.5	12.3	5.4	5.7	PBT or NYLON, White VS. gray

◎ Typical Parameters and Magnetic Properties

Lm (mm)	Ac (mm ²)	Wa (mm ²)	WaAc (mm ⁴)	Vol (mm ³)	100KHz, 80A/m RT	
					ϕ_c (μ Wb)	Br/Bm(%)
26.69	3.080	22.89	70.503	102.76	6.776	90 MIN


◎ Core Finished Material:

Insulating Covers:UL94V-0 or equivalent

◎ Temperature Range:


Storage temperature -20 ~ +50 °C Ambient Temperature

Operating Temperature -40 ~ +120 °C Case Surface Temperature

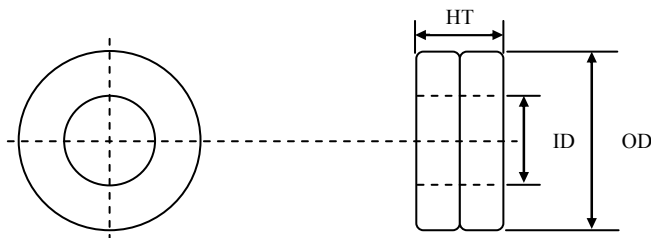

WIRE	0.8 ϕ	TURNS	0.5 Ts	TEMP.	25 °C
------	------------	-------	--------	-------	-------

Hysteresis loops of core materials

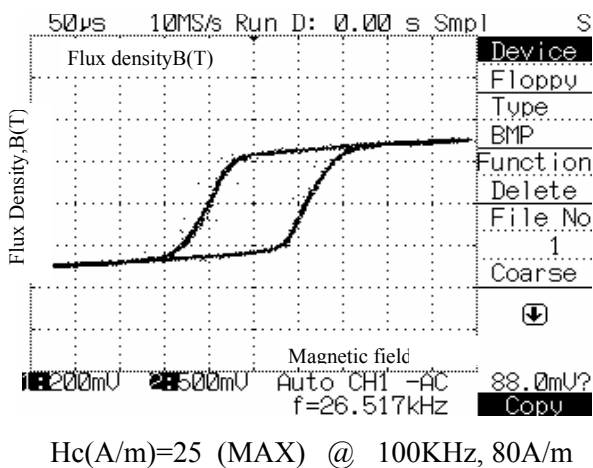

Magnetic Induction (Gauss) VS. Core Loss

