

AITIOU

A12C-1

◎ Amorphous Toroidal Core(Used Mag-Amp)

◎ Mechanical Properties

Bare Core Dimensions (mm)			Finished Core Dimensions (mm)			Case Material & Color
O.D _{MAX}	I.D _{MIN}	H.T _{±0.2}	O.D _{±0.3}	I.D _{±0.3}	H.T _{±0.3}	
12.4	8.5	4.5	14.4	6.7	6.9	PBT or NYLON,White

◎ Typical Parameters and Magnetic Properties

Lm (mm)	Ac (mm ²)	Wa (mm ²)	WaAc (mm ⁴)	Vol (mm ³)	100KHz, 80A/m RT	
					ϕ_c (μ Wb)	Br/Bm(%)
32.81	7.020	35.24	247.375	287.93	7.72	94 MIN


◎ Core Finished Material:

Insulating Covers:UL94V-0 or equivalent

◎ Temperature Range:


Storage temperature-20 ~ +50 °C Ambient Temperature

Operating Temperature -40 ~ +120 °C Case Surface Temperature

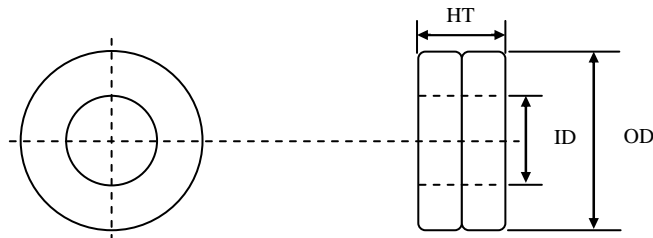

WIRE	0.8 ϕ	TURNS	0.5 Ts	TEMP.	25 °C
------	------------	-------	--------	-------	-------

Hysteresis loops of core materials

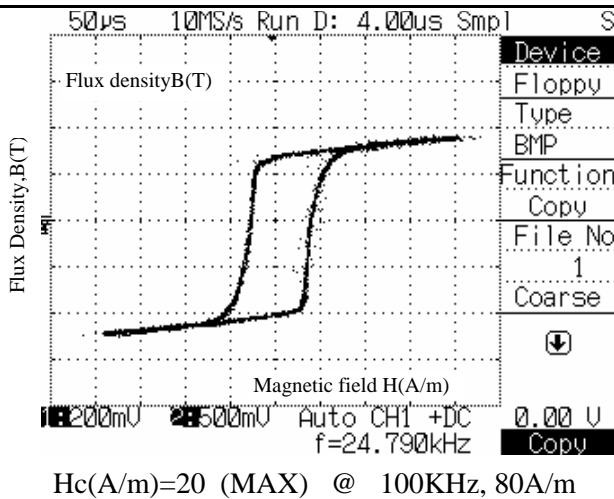

Magnetic Induction (Gauss) VS. Core Loss

