

AITIOU

A10N-1

◎ Amorphous Toroidal Core(Used Mag-Amp)

◎ Mechanical Properties

Bare Core Dimensions (mm)			Finished Core Dimensions (mm)			Case Material & Color
O.D _{±0.2}	I.D _{±0.2}	H.T _{±0.2}	O.D _{±0.3}	I.D _{±0.3}	H.T _{±0.3}	
10.5	7.4	4.5	12.2	5.6	6.5	PBT or NYLON,Black

◎ Typical Parameters and Magnetic Properties

Lm (mm)	Ac (mm ²)	Wa (mm ²)	WaAc (mm ⁴)	Vol (mm ³)	100KHz, 80A/m RT	
					ψc(μ Wb)	Br/Bm(%)
28.10	5.58	24.62	137.37	196.02	12.28	90 MIN


◎ Core Finished Material:

Insulating Covers:UL94V-0 or equivalent

◎ Temperature Range:


Storage temperature-20 ~ +50°C Ambient Temperature

Operating Temperature -40 ~ +120°C Case Surface Temperature

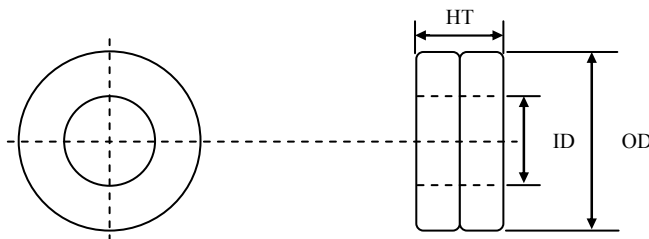

WIRE	0.8φ	TURNS	10Ts	TEMP.	25°C
------	------	-------	------	-------	------

Hysteresis loops of core materials

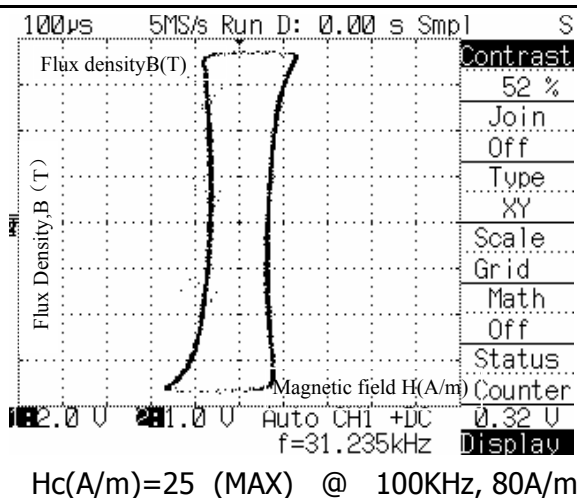

Magnetic Induction (Gauss) VS. Core Loss

