

# AITIOU

## A10F-3

⊙ Amorphous Toroidal Core(Used Mag-Amp)

⊙ Mechanical Properties

Bare Core Dimensions (mm)			Finished Core Dimensions (mm)			Case Material & Color
O.D <sub>MAX</sub>	I.D <sub>MIN</sub>	H.T <sub>±0.2</sub>	O.D <sub>±0.3</sub>	I.D <sub>±0.3</sub>	H.T <sub>±0.3</sub>	
10.6	7.4	4.5	12.2	5.6	6.5	PBT or NYLON,Black

⊙ Typical Parameters and Magnetic Properties

Lm (mm)	Ac (mm <sup>2</sup> )	Wa (mm <sup>2</sup> )	WaAc (mm <sup>4</sup> )	Vol (mm <sup>3</sup> )	100KHz, 80A/m RT	
					ψc(μ Wb)	Br/Bm(%)
28.26	5.76	24.62	141.80	203.47	12.67	90 MIN


⊙ Core Finished Material:

Insulating Covers:UL94V-0 or equivalent

⊙ Temperature Range:


Storage temperature-20 ~ +50°C Ambient Temperature

Operating Temperature -40 ~ +120°C Case Surfsce Temperature

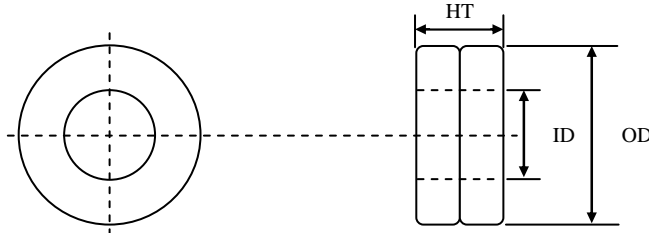

WIRE	0.8φ	TURNS	0.5 Ts	TEMP.	25°C
------	------	-------	--------	-------	------

Hysterisis loops of core materials

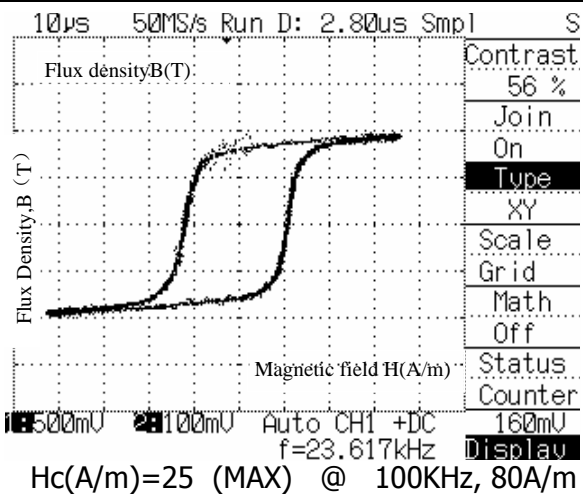

Magnetic Induction (Gauss) VS. Core Loss

